

Crystal Digital PCR® Assay

Information Sheet

For Research Use Only. Not for use in diagnostic procedures.

Product Name

BRAF (V600E, drop-off V600-K601) Crystal Digital PCR® Assay (R51021)

Description

Detected Targets

Targets	Sample Type	Detection Channels	Multiplex
BRAF (V600E, drop-off V600-K601)	DNA	Blue/Green/Red	3

The BRAF (V600E, drop-off V600-K601) Crystal Digital PCR® Assay is a 10X assay designed to detect and quantify mutations in codons V600 and K601 plus 1 mutation of the BRAF gene. BRAF is pivotal in regulating cell signaling pathways implicated in cancer development, notably melanoma, colorectal cancer and thyroid cancer, through its role in the MAPK/ERK pathway. Mutations in BRAF, particularly the V600E mutation, lead to uncontrolled cell proliferation and survival.

Multiplexing Strategy: Color-Combination

This assay relies on the Color-Combination multiplexing strategy proprietary to Stilla Technologies, in which targets are detected, differentiated, and quantified by Crystal Digital PCR using 2 fluorophores.

The table below indicates with a “X” which channel(s) are used for each target in the assay:

Targets	Base changes	Blue	Teal	Green	Yellow	Red	Infra-Red	Long-Shift
Wild-type (WT) BRAF V600-K601	N/A	X		X				
Additional mutant (Add. MUT) BRAF V600-K601	N/A			X				
BRAF V600E	c.1799T>A			X		X		

Remark: The mutants potentially detected by the drop-off system are mutations in addition to BRAF V600E targeted directly by a specific probe. Thus, if BRAF V600E is detected, it will not be quantified by the drop-off system. Conversely, if a V600-K601 mutation other than V600E is detected, it will be quantified by the drop-off system (Population: Add. MUT BRAF V600-K601).

Components

BRAF (V600E, drop-off V600-K601) Crystal Digital PCR® Assay comprises two reagents: a pool of the assay specific primers and Crystal Flex Probes and a Positive Control. Please refer to the lot specific Certificate of Conformity for characterized concentration, available upon demand to Stilla's Technical Support team at support-stilla@bio-rad.com.

Component Name	Reference	Concentration	Description
BRAF (V600E, drop-off V600-K601) Crystal Digital PCR® Assay	R51021	10X	Detects mutations in codons V600 and K601 of the BRAF gene and individually detects 1 mutation in the BRAF gene
KRAS Positive Control	R51021.PC0	10X	Contains: hgDNA, Synthetic BRAF mutants (V600E, V600K, K601E, K601N)

Thermocycling Programs

On the naica system:

Step		Ramp rate
Step 1	Partition for Ruby Chip	-
Step 2	Temperature 95°C for 180 seconds	1°C/sec
Step 3	Begin Loop for 60 Iterations	-
Step 3.1	Temperature 95°C for 15 seconds	1°C/sec
Step 3.2	Temperature 60°C for 30 seconds	1°C/sec
Step 4	Temperature 58°C for 300 seconds	1°C/sec
Step 5	Release for Ruby Chip	-

On the Nio Digital PCR:

Step		Ramp rate
Step 1	Partition for Ruby Chip	-
Step 2	Temperature 95°C for 180 seconds	1°C/sec
Step 3	Begin Loop for 60 Iterations	-
Step 3.1	Temperature 95°C for 15 seconds	2°C/sec
Step 3.2	Temperature 60°C for 30 seconds	2°C/sec
Step 4	Temperature 58°C for 300 seconds	1°C/sec
Step 5	Release for Ruby Chip	-

Data Acquisition

Download Nio dedicated technical files from bio-rad.com.

- NioProtocol_3C-60X-60°C-30s+58°C300s.nioprotocol (Nio Digital PCR)
- NioAssay_3C_BRAF_R51021.nioassay (Nio Digital PCR)

Download naica dedicated technical files from bio-rad.com.

- ScanningTemplate_Prism3_BRAF_R51021.ncx (3-color naica system)
- ScanningTemplate_Prism6_BRAF_R51021.ncx (6-color naica system)

Data Analysis

The following files are embedded in the dedicated scanning files listed above:

- CompensationMatrix_Prism3_BRAF_R51021.ncm (3-color naica system)
- CompensationMatrix_Prism6_BRAF_R51021.ncm (6-color naica system)
- CompensationMatrix_Nio_BRAF_R51021.ncm (Nio Digital PCR)
- AnalysisConfiguration_BRAF_R51021.nca (all systems)

Consumables Required but Not Provided

- Ruby Chip (C16011)
- naica® PCR MIX 10X (R10106)
- Crystal Universal Reporters 3 (R41401 200 reactions, R41402 1000 reactions)
- Nuclease-free water

Instruction for PCR Mix Preparation

Specific instructions for preparing the PCR mix are given below.

Reagent Name		Initial Concentration	Final Concentration	Volume per reaction (µL)
naica® PCR MIX Buffer A	●	10x	1x	0.60
naica® PCR MIX Buffer B	●	100%	4%	0.24
Crystal Digital PCR® Assay	●	10x	1x	0.60
Crystal Universal Reporter Tube A	●	40x	1x	0.15
Nuclease-free water		NA	NA	Variable
Template DNA		NA	NA	Variable
<i>or Positive Control</i>	○	10x	1x	0.60
<i>Total reaction volume (µL)</i>				6.0

DNA Digestion

DNA samples with ≥10 kb average length (e.g., genomic DNA) could be fragmented by restriction digestion before partitioning to ensure even distribution of the DNA template during partitioning. Restriction digestion is not required for highly fragmented DNA (e.g., FFPE DNA or circulating DNA). This step could improve assay performance and should be tested utilizing desired samples.

Care must be taken to use restriction enzymes that do not cut within the amplified sequence or the Crystal Flex Probes.

For a list of restriction enzymes compatible with a given Crystal Digital PCR® assay, contact our Technical Support team (support-stilla@bio-rad.com).

Loading Amount

For optimal performance, it is recommended not to exceed a chamber concentration (DNA concentration in the reaction mix) of 1,000 copies/ μ L. The performance of the assay at higher concentrations is not guaranteed and must be validated by the user.

Representative Data and Instructions for Analysis

Set thresholds for separating positive and negative populations on the 1D plots. To optimize the analysis of the drop-off system, the Blue threshold should be set just above the negative cluster, the Green threshold should be set just below the positive cluster and the Red threshold should be set at approximately equal distance from the positive and negative clusters. Examples of results obtained on the Nio+ are given below.

Remark: The Blue threshold can be adjusted on each individual chamber to optimize its placement. In this case, it is recommended to adjust the threshold in the 2D-plots.

Wet lab testing was carried out using genomic hgDNA as a negative control and a positive control consisting of hgDNA and 4 synthetic BRAF mutants (V600E, V600K, K601E, K601N). Synthetic BRAF mutants were also tested individually (V600E, V600K, K601E, K601N).

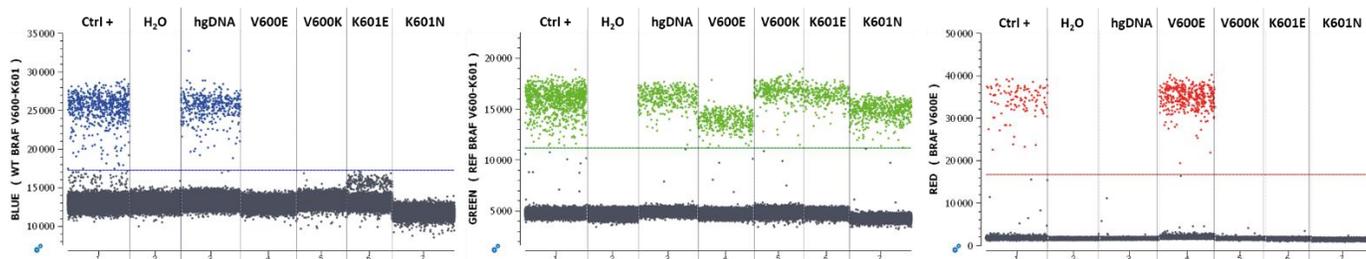


Figure 1: 1D plots obtained during wet lab testing on the Nio+. The Blue threshold is set just above the negative cluster, the Green threshold is set just below the positive cluster and the Red threshold is set at approximately equal distance from the positive and negative clusters. Remark: a slight non-specific reaction of BRAF V600-K601 WT probe on BRAF K601E may be observed in the Blue channel.

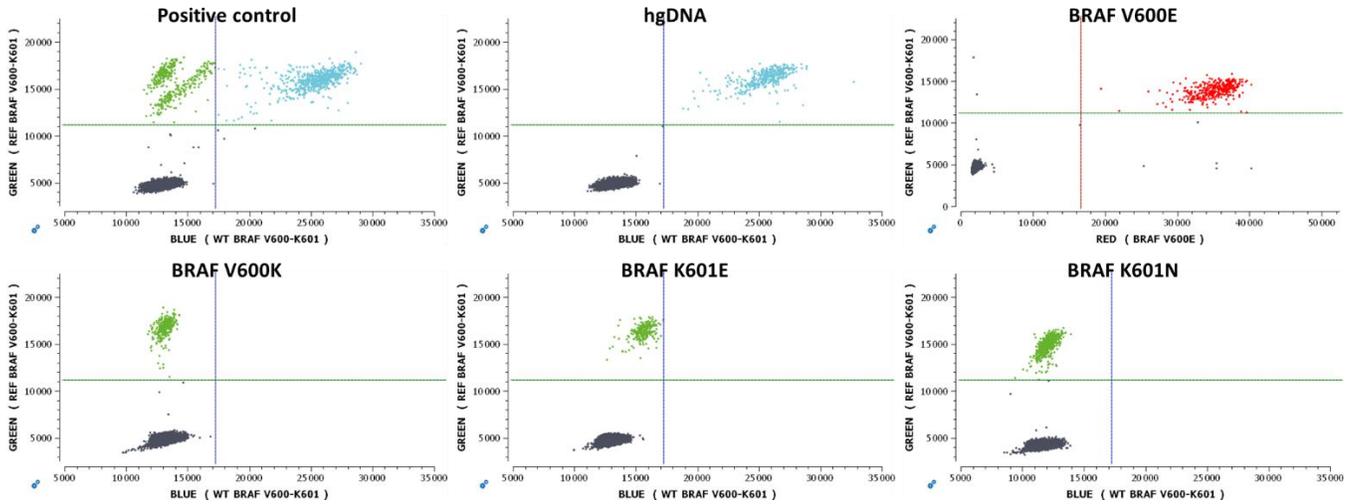


Figure 2: 2D plots obtained during wet lab testing on the Nio+. The Blue-Green double-positive population corresponds to wild-type DNA while the Red-Green double-positive population corresponds to BRAF V600E. The Green single-positive population corresponds to additional V600-K601 mutated DNA such as V600K/K601E/K601N.

Post-Processing (only available with NioAnalyzer software)

To perform a post-processing analysis of the results, click on “Setup” in the “POST PROCESSING” menu and select the appropriate analysis: **Mutant Allelic Fraction (MAF)**. Follow specific instructions for this assay:

Post-Processing Type

- None
- Copy Number Variation (CNV)
- Mutant Allelic Fraction (MAF)
- Gene Expression (GEX)
- Linkage Analysis

The Mutant Allele Frequency (MAF) is the ratio of the mutant gene concentration (C_{target}) versus the total concentration of both the mutant and the wild type (C_{ref}).

$$MAF = \left(\frac{C_{target}}{C_{ref} + C_{target}} \right) \times 100$$

Settings

- WT BRAF V600-K601
- Add. MUT BRAF V600-K601
- BRAF V600E

	Target	Reference
<input checked="" type="checkbox"/>	Add. MUT BRAF V600-K601	WT BRAF V600-K601
<input checked="" type="checkbox"/>	BRAF V600E	WT BRAF V600-K601

Use same reference for all targets
 Select a custom reference per target

All populations should be added to processing, and “WT BRAF V600-K601” selected as reference.

Clicking on apply will launch the calculation. The values will be displayed in the “Results” tab.

AIS_R51021_v4



Stilla Technologies
F-94800 Villejuif, FRANCE

Registered names and trademarks used in this document, even when not specifically marked, are not to be considered unprotected by law.